

RG-RAP6262

Reyee AX3000 High-performance Outdoor Omni-directional Access Point







Highlights

- UFO-style design – perfect blend of high performance and full coverage.
- Wi-Fi 6 ultra-high-speed.
- Long-distance deployment with optical ports.
- IP68 rating, adapting to harsh environments.
- Easily adding extra outdoor Wi-Fi with Reyee mesh.

Highlight Features

A Perfect Blend of High Performance and Full Coverage



Enter the Era of Ultra-high Wi-Fi 6 Speed


With a revolutionary combination of OFDMA and 1024QAM, the latest 802.11ax standard, and the 160MHz band, RG-RAP6262 wireless aggregation rate reaches 2.976Gbps.



Highlight Features

Support Extra-Distance Access Point Deployment

With gigabit SFP port, the device supports up to 20km transmission from datacenter with single mode fiber

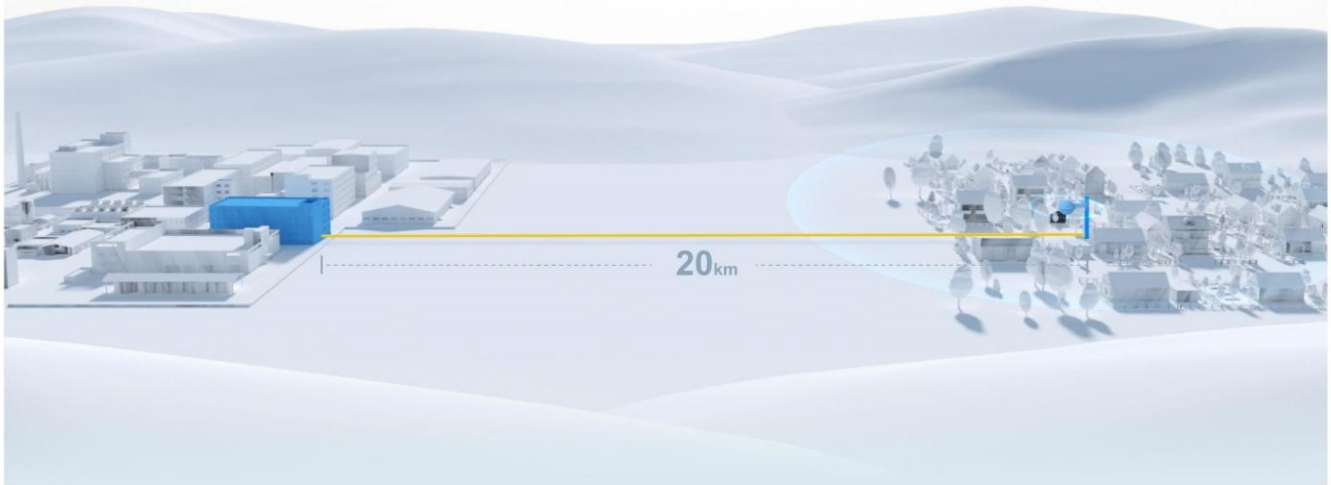

Rock-solid in Harsh Environments

Adopts completely sealed, waterproof, dustproof, moisture proof and flame-retardant, wind erosion protection, Wide Temperature range, and 4kV surge protection design.



 IP68 Protection

 4kV Lighting Protection


 Wind Erosion Protection

 -30°C ~ 65°C Flame-Retardant

Highlight Features

Omni-directional Coverage with Long Range


Built-in 5 high gain antennas, supports full coverage with radius of 100 meters at 2.4GHz, and 300 meters at 5GHz*.

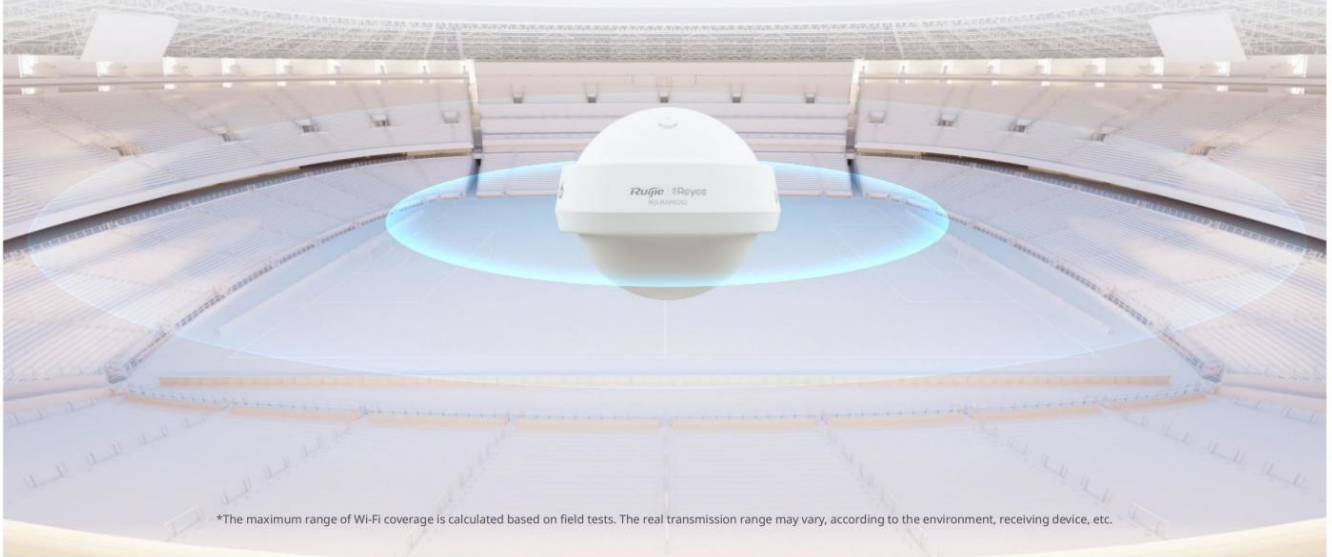

*The maximum range of Wi-Fi coverage is calculated based on field tests. The real transmission range may vary, according to the environment, receiving device, etc.

Easily Expand Extra Outdoor Wi-Fi with Reyee Mesh

Less wiring, more relaxing

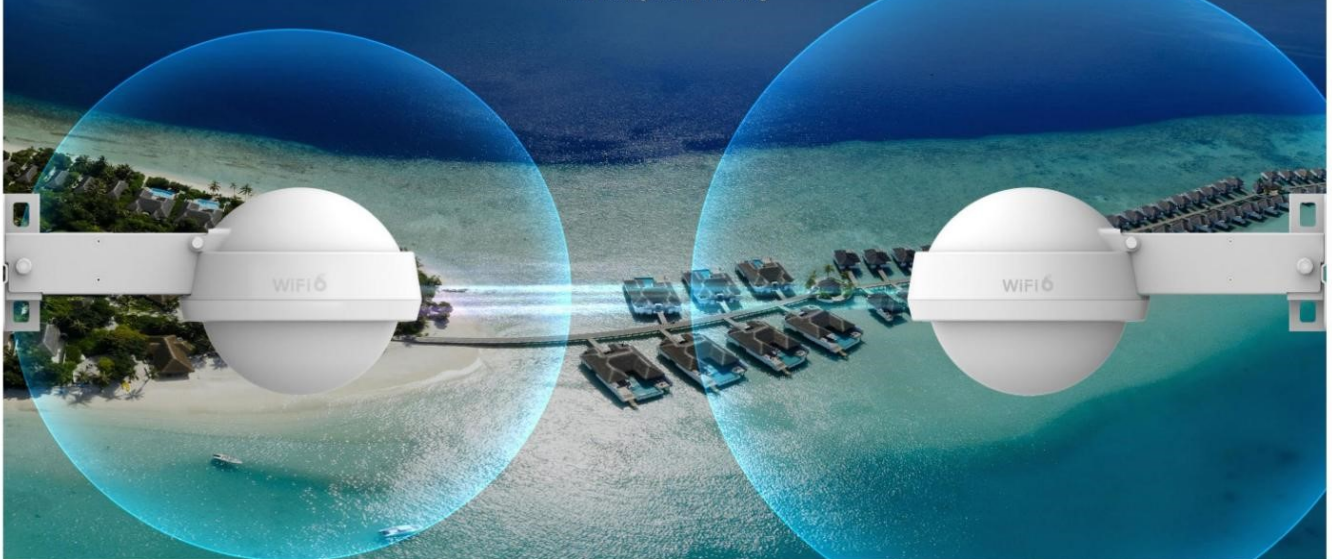

Highlight Features

Easy Installation, Firmly Fixed

Rack-separated mounting design, easily installation on high. Replace plastic cable ties by iron hoop.



Cloud, Make Your Business Easy

- Remote monitoring
- Remote Wi-Fi management
- Cloud portal authentication
- Wireless intelligent optimization



Product Information

Model	RG-RAP6262
Product Type	Outdoor AP

Hardware Specifications

Model	RG-RAP6262
Wi-Fi Radio	
6 GHz Wi-Fi	No
5 GHz Wi-Fi	Wi-Fi 4 (IEEE 802.11a/n) Wi-Fi 5 (IEEE 802.11ac) Wi-Fi 6 (IEEE 802.11ax)
2.4 GHz Wi-Fi	Wi-Fi 4 (IEEE 802.11b/g/n) Wi-Fi 6 (IEEE 802.11ax)
Operating band	IEEE 802.11b/g/n/ax, 2.400 GHz to 2.4835 GHz IEEE 802.11a/n/ac/ax, 5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz, 5.725 GHz to 5.850 GHz Note: Available bands vary with countries and regions. To use the preceding frequency bands, ensure that your country or region supports these frequency bands.
Radio design	Dual-radio 4 spatial streams <ul style="list-style-type: none">• 2.4 GHz: 2 x 2, MU-MIMO• 5 GHz: 2 x 2, MU-MIMO
FEM	2.4 GHz: 2 x eFEM 5 GHz: 3 x eFEM
6 GHz channel width	No
5 GHz channel width	Auto/20/40/80/160 MHz
2.4 GHz channel width	Auto/20/40 MHz
Maximum wireless data rate	2974 Mbps
6 GHz wireless data rate	No
5 GHz wireless data rate	2401 Mbps
2.4 GHz wireless data rate	573 Mbps

Hardware Specifications

Model	RG-RAP6262
Maximum transmit power	<p>Frequency bands and maximum Effective Isotropic Radiated Power (EIRP):</p> <p>Note: Country specific restrictions apply.</p> <p>European Union & United Kingdom: 2400–2483.5 MHz, EIRP ≤ 20 dBm 5470–5725 MHz, EIRP ≤ 30 dBm</p> <p>United States: 2400–2483.5 MHz, max output power ≤ 30 dBm & EIRP ≤ 36 dBm</p> <p>5150–5250 MHz, max output power ≤ 30 dBm & EIRP ≤ 36 dBm 5250–5350 MHz, max output power < 24 dBm & EIRP ≤ 30 dBm 5470–5725 MHz, max output power < 24 dBm & EIRP ≤ 30 dBm 5725–5850 MHz, max output power ≤ 30 dBm & EIRP ≤ 36 dBm</p> <p>Myanmar: 2400–2483.5 MHz, EIRP ≤ 23 dBm 5725–5825 MHz, EIRP ≤ 30 dBm</p> <p>Thailand: 2400–2483.5 MHz, EIRP ≤ 20 dBm 5470–5725 MHz, EIRP ≤ 30 dBm 5725–5825 MHz, EIRP ≤ 30 dBm</p> <p>Indonesia: 2400–2483.5 MHz, EIRP ≤ 36 dBm 5725–5825 MHz, EIRP ≤ 36 dBm</p> <p>Egypt: 2400–2483.5 MHz, EIRP ≤ 20 dBm 5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>Vietnam: 2400–2483.5 MHz, EIRP ≤ 23 dBm 5150–5350 MHz, EIRP ≤ 23 dBm 5470–5725 MHz, EIRP ≤ 30 dBm 5725–5850 MHz, EIRP ≤ 30 dBm</p>
Maximum transmit power (6 GHz)	No
Maximum transmit power (5 GHz)	<p>Combined power: 30.7 dBm (single-stream power: 26 dBm)</p> <p>Note: The transmit power varies according to regulations in different countries and regions.</p>
Maximum transmit power (2.4 GHz)	<p>Combined power: 29 dBm (single-stream power: 26 dBm)</p> <p>Note: The transmit power varies according to regulations in different countries and regions.</p>
Coverage range	<p>5 GHz max: 400 m (1312.34 ft.) 2.4 GHz max: 150 m (492.13 ft.)</p> <p>5 GHz recommended: 200 m (656.17 ft.) 2.4 GHz recommended: 50 m (164.04 ft.)</p> <p>Note: The data is obtained in an ideal environment without</p>

Hardware Specifications

Model	RG-RAP6262
	obstruction. The signal coverage radius depends on client performance and environmental interference.
Modulation	OFDM: BPSK @ 6/9 Mbps, QPSK @ 12/18 Mbps, 16-QAM @ 24 Mbps, 64-QAM @ 48/54 Mbps DSSS: DBPSK @ 1 Mbps, DQPSK @ 2 Mbps, and CCK @ 5.5/11 Mbps MIMO-OFDM: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM and 1024-QAM OFDMA
Receive sensitivity	11b: -91 dBm (1 Mbps), -88 dBm (5.5 Mbps), -85 dBm (11 Mbps) 11a/g: -89 dBm (6 Mbps), -80 dBm (24 Mbps), -76 dBm (36 Mbps), -71 dBm (54 Mbps) 11n: -83 dBm (MCS0), -65 dBm (MCS7), -83 dBm (MCS8), -65 dBm (MCS15) 11ac: 20 MHz: -83 dBm (MCS0), -57 dBm (MCS9) 11ac: 40 MHz: -79 dBm (MCS0), -57 dBm (MCS9) 11ac: 80 MHz: -76 dBm (MCS0), -51 dBm (MCS9) 11ac: 160 MHz: -76 dBm (MCS0), -50 dBm (MCS9) 11ax: 20 MHz: -85 dBm (MCS0), -58 dBm (MCS11) 11ax: 40 MHz: -82 dBm (MCS0), -54 dBm (MCS11) 11ax: 80 MHz: -79 dBm (MCS0), -52 dBm (MCS11) 11ax: 160 MHz: -76 dBm (MCS0), -49 dBm (MCS11)
Antenna	
Antenna	2.4 GHz: 2 built-in omnidirectional antennas 5 GHz: 3 built-in omnidirectional antennas
Antenna horizontal orientation	No
Antenna vertical orientation	No
Antenna gain (6 GHz)	No
Antenna gain (5 GHz)	4.00 dBi
Antenna gain (2.4 GHz)	3.00 dBi
Dimensions and Weight	
Product dimensions (diameter x height)	Ø230 mm x 195 mm (Ø9.06 in. x 7.68 in.) (spherical device, excluding the mounting bracket)
Color	White
Weight	≤ 1.4 kg (3.09 lbs.) (without packaging materials)

Hardware Specifications

Model	RG-RAP6262
Shipping weight	≤ 4.62 kg (10.19 lbs.)
Port Specifications	
Number of 10/100/1000BASE-T ports	1
Number of 1GE SFP ports	1
Reset button	1
LEDs	1 x system status LED 1 x Wi-Fi LED 2 x Ethernet port LEDs
Power Supply and Consumption	
Power supply	<ul style="list-style-type: none">• DC power adapter• PoE/PoE+ Note: If both the DC power adapter and PoE/PoE+ are available for power supply, the DC power adapter is preferred.
Local power supply	Yes, one DC power connector (12 V, 2 A)
Dimensions of the DC connector	Outer diameter: 5.5 mm (0.22 in.) Inner diameter: 2.1 mm (0.08 in.) Depth: 10 mm (0.39 in.)
PoE In standard	<ul style="list-style-type: none">• IEEE 802.3af (PoE) Note: Radio transmission and reception is limited to 2T2R at 2.4 GHz and 5 GHz, and the wireless rate at 5 GHz is 60% of the original rate. <ul style="list-style-type: none">• IEEE 802.3at (PoE+)
PoE budget	No
Maximum power consumption	24 W
Environment and Reliability	
Operating temperature	-30°C to +65°C (-22°F to +149°F)
Storage temperature	-40°C to +85°C (-40°F to +185°F)
Operating humidity	0% RH to 100% RH (non-condensing)
Storage humidity	0% RH to 100% RH (non-condensing)
Mounting options	Wall/Pole
IP rating	IP68

/ Hardware Specifications

Model	RG-RAP6262
Surge protection	Ethernet port: ± 4 kV for common mode
MTBF	400,000 hours
Certification and Regulatory Compliance	
RoHS	Yes
Safety compliance	EN 62368-1
EMC	EN 55032 EN 55035 EN 61000-3-3 EN 61000-3-2 EN 301489-1 EN 301489-3 EN 301489-17
RF	EN 300 328 EN 301 893 EN 300 440
Certification	CE, FCC, CB, ISED, cTUVus
System Specifications	
Flash memory	128 MB
RAM	256 MB DDR3

Software Specifications

Model	RG-RAP6262
Basic Configurations	
AP mode	Yes
Routing mode	Yes
Internet access mode	Static IP address Static IPv6 address Dynamic IP address Dynamic IPv6 address PPPoE
Interface	
IPTV transparent transmission	No
Ethernet Interface	
PPPoE clients	Yes
Ethernet Switching	
IEEE 802.1Q VLAN	Yes
WLAN	
Maximum number of associated wireless clients	64 (2.4 GHz) 512 (5 GHz) 512 (2.4 GHz and 5 GHz enabled)
Recommended number of associated wireless clients	<ul style="list-style-type: none"> ● Support for IEEE 802.11ax and 160 MHz: <ul style="list-style-type: none"> 16 (2.4 GHz) 94 (5 GHz) 110 (2.4 GHz and 5 GHz enabled) ● Support for IEEE 802.11ax and 80 MHz: <ul style="list-style-type: none"> 16 (2.4 GHz) 64 (5 GHz) 80 (2.4 GHz and 5 GHz enabled) <ul style="list-style-type: none"> ● Support for IEEE 802.11ac: <ul style="list-style-type: none"> 8 (2.4 GHz) 32 (5 GHz) 40 (2.4 GHz and 5 GHz enabled)
Maximum number of SSIDs	8
Radio-based client limiting	Yes
Layer 2 isolation	Yes

Software Specifications

Model	RG-RAP6262
OFDMA	Yes
WMM	Yes
DFS	Yes
MLO	No
4K-QAM	No
Different SSIDs for the same VLAN	Yes
Enabling/Disabling MLO	No
AP load balancing	Yes
Beamforming	Yes
802.11k/v roaming	Yes
Fast transition (802.11r)	Yes
Layer 2 roaming	Yes
Layer 3 roaming	Yes
AI roaming	Yes
PSK authentication	Yes
Static allowlist	Yes
Adjusting the transmit power for beacon and probe frames	Yes
Encryption mode (WPA-PSK, WPA2-PSK, WPA/WPA2-PSK)	Yes
OWE (Enhanced Open) WPA3-SAE WPA2-PSK/WPA3-SAE	Yes
Number of blocklists and allowlists based on MAC addresses (single SSID)	256
Number of global blocklists/allowlists	256

Software Specifications

Model	RG-RAP6262
Mesh management	Yes
AP Mesh	Yes
AP portal authentication	Yes
Maximum number of devices that can be managed	300
One-Click Network Optimization	Yes
Static blacklist	Yes
IP Service	
ARP binding	Yes
IPv4 ping	Yes
IPv6 ping	Yes
Traceroute	Yes
Static/Dynamic NAT	Yes
DHCP server	Yes
IPv6	Yes
Authentication	
802.1X authentication	Yes
Network Management and Monitoring	
Wireless repeater mode	Yes
Web login information	Single-device login address: 10.44.77.254 Network-wide login address: 10.44.77.253 Default password: admin
Network-wide configuration and management	Yes
Ruijie Reyee App management	Yes
eWeb management	Yes
Ruijie Cloud management	Yes

Software Specifications

Model	RG-RAP6262
SNMP	Yes
Configuration synchronization among the app, eWeb, and Ruijie Cloud	Yes
Displaying device information on Ruijie Cloud	Yes

/ Package Contents

Model	RG-RAP6262
Package Contents	
Package Contents	1 x AP 2 x Hose clamps 1 x Mounting bracket 2 x Internal/External hex machine screws (M8 x 20 mm) 4 x Expansion anchors (M8 x 60 mm) 1 x Mounting arm (Pre-installed) 1 x Cover of a mounting arm 1 x Cable gland for an SFP port 1 x SFP port plug (pre-installed) 1 x User Manual 1 x Warranty Card
Accessories	
Power adapter	No

Ruijie | ReYee

 Redefine your easy network



Ruijie Networks Co., Ltd.

Official Website: <https://Reyee.Ruijie.com>